

FRONT

FRONT SHOCKS

☐ Plastic ☐ Aluminium

OIL: _____

PISTON: _____ holes

SPRING: _____

LENTGH: min _____


STEERING

TOE ☐ in ☐ 0 ☐ Medium ☐ High
☐ out


Tie rod
installation

CENTER STEERING ☐ Yes ☐ No

SERVO SAVER: _____

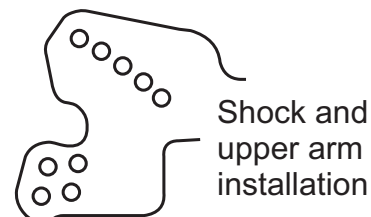

Shock and upper arm installation

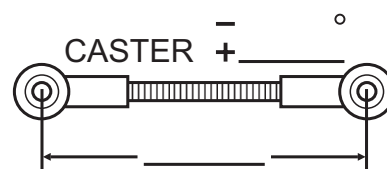


CASTER - + °

RIDE HEIGHT: _____ max _____

NOTE: _____

ANTI-ROLL BAR

Wire ☐ No ☐ Ø: _____

ONE-WAY ☐ No ☐ Center ☐ Front


CAMBER - + °

REAR

REAR SHOCKS


☐ Plastic ☐ Aluminium

OIL: _____


PISTON: _____ holes

SPRING: _____

LENTGH: min _____

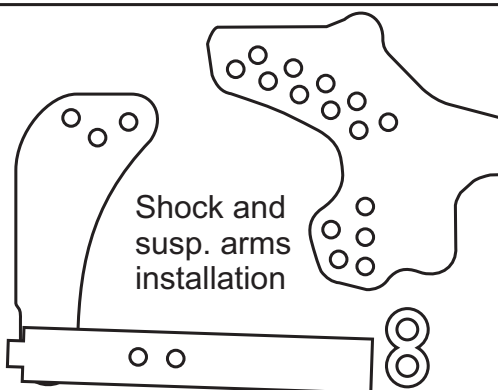

Shock and susp. arms installation

TOE IN
Chassis ☐ 0,5° (47mm) ☐ 1° (48mm)
Susp. arm ☐ 1° (#1) ☐ 2° (#2)



ANTI-SQUAT 0° 4°

RIDE HEIGHT: _____ max _____

NOTE: _____

ANTI-ROLL BAR

Wire ☐ No ☐ Ø: _____

In arm ☐ in ☐ out


CAMBER - + °

FRONT TIRES

RUBBER: _____

INSERT: _____

WHEEL: _____

REAR TIRES

RUBBER: _____

INSERT: _____

WHEEL: _____

BODY: _____

MOTOR: _____

NOTE: _____

TRACK

TYPE ☐ Tight ☐ Smooth ☐ Open ☐ Bumpy

SURFACE ☐ Asphalt ☐ Carpet ☐ Other

TRACTION ☐ Low ☐ Medium ☐ High

GEAR RATIO

2,13	116	118	120	122	124	125	2,13	87	93	96
32	7,72	7,85	7,99	8,12	8,25	8,32	22	8,42	9,00	9,29
33	7,49	7,62	7,75	7,87	8,00	8,07	23	8,06	8,61	8,89
34	7,27	7,39	7,52	7,64	7,77	7,83	24	7,72	8,25	8,52
35	7,06	7,18	7,30	7,42	7,55	7,61	25	7,41	7,92	8,18
36	6,86	6,98	7,10	7,22	7,34	7,40	26	7,13	7,62	7,86
37	6,68	6,79	6,91	7,02	7,14	7,20	27	6,86	7,34	7,57
38	6,50	6,61	6,73	6,84	6,95	7,01	28	6,62	7,07	7,30
39	6,34	6,44	6,55	6,66	6,77	6,83	29	6,39	6,83	7,05
40	6,18	6,28	6,39	6,50	6,60	6,66	30	6,18	6,60	6,82
							31	5,98	6,39	6,60