



SETUP SHEET

Driver: _____

Date: _____

Track:

☐ Indoor
☐ Outdoor
☐ Tight / ☐ Open

☐ Carpet
☐ Concrete
☐ Asphalt

☐ Sealed
☐ Smooth
☐ Rough

FRONT SUSPENSION

(Circle or Check the Appropriate Settings)

☐ In
Toe ☐ Out _____

Ride Height _____

☐ -
Camber ☐ + _____

Caster:

☐ Kickup _____

☐ Antidive _____

☐ Carrier _____

☐ No
Sway Bar ☐ Yes size _____

Droop Height: _____

Pivot Support: _____

Arm Spacing

☐ FWD

☐ MDL

☐ BACK

Ackerman Position

☐ Forward

☐ Back

Front Drive:

☐ Diff

☐ One-Way

☐ Spool

Camber
Ball Stud:

☐  (Chrome)
☐  (Black)

☐ Standard 42F 42R

☐ Overdrive 41F 42R


☐ Underdrive 42F 41R

of washers under steering/
tie-rod ball studs

Spindle ball stud: _____

Bellcrank ball stud: _____

and size of washers
under camber ball stud _____

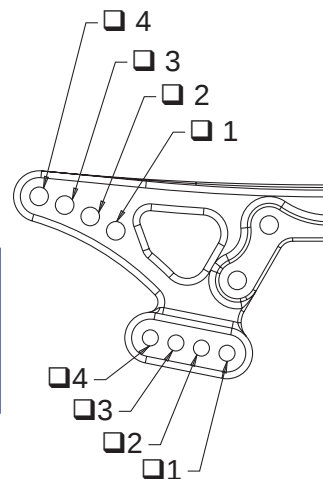

RollCenter:

☐ High ☐ Low

☐ Other _____

Front Shocks

Oil: _____ Shock Length: _____

Piston: _____ ☐ Standard / ☐ Drilled

Spring: _____

Limiters: ☐ Inside _____ ☐ Outside _____

NOTES: _____

REAR SUSPENSION

☐ In
Toe ☐ Out _____

Ride Height _____

☐ -
Camber ☐ + _____

☐ No
Sway Bar ☐ Yes size _____

Droop Height: _____

Pivot Support: _____

Arm Spacing

☐ FWD

☐ MDL

☐ BACK

Camber
Ball Stud:

☐  (Chrome)
☐  (Black)

and size of washers
under camber ball stud _____

☐ B

☐ A


Hole
Number: _____

☐ Outside

☐ Inside

☐ Off-set

☐ Standard

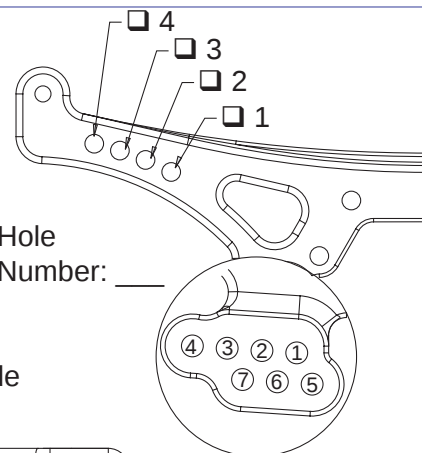

RollCenter:

☐ High ☐ Low

☐ Other _____

Rear Shocks

Oil: _____ Shock Length: _____

Piston: _____ ☐ Standard / ☐ Drilled

Spring: _____

Limiters: ☐ Inside _____ ☐ Outside _____

NOTES: _____

Tires: _____ Compound _____ Insert _____ Wheel _____ Tire Dia. _____ Vehicle Weight _____

Front: _____

Rear: _____

Battery Placement: ☐ Back ☐ Forward ☐ Split: #Fwd _____ #Back _____ ☐ Tire Additive: _____

Transponder Position: _____

Notes: _____

Motor: _____

Pinion: _____

Spur: _____

Body: _____

Body Height: _____

Wing: _____